

SCHOTTKY DIODES KDN-05040A.


Rev.1. Feb. 2010




VSP-MIKRON

5A/40V. Die Size-69mil.

Electrical Characteristics	Symbol	Unit	Spec. limit	Die Sort
Breakdown Voltage @ $I_R=10\text{mA}$	V_B	V	40	45
Average Rectified Forward Current	$I_{F(AV)}$	A	5,0	-
DC Forward Voltage @ 25°C , $I_F=5,0\text{A}$	V_F	V	0,52	0,50
Maximum Reverse Current @ 25°C , $V_R=45\text{V}$ 25°C , $V_R=40\text{V}$ 125°C , $V_R=40\text{V}$	I_R	MA	- 0,120 0,090 60,0	0,120 0,090 55,0
Peak Forward Surge Current 8,3ms single half sine-wave superimposed on rated load (JEDEC METHOD)	I_{FSM}	A	125	-
Peak Repetitive Reverse Surge Current @ $2,0\mu\text{s}$, $f=1\text{kHz.}$, $T_J<150^\circ\text{C.}$	I_{RRM}	A	3,0	
Electrostatic Discharge Voltage. JEDEC Method. ESD HBM. Contact.	ESD	kV	± 8 (contact)	
Voltage Rate of Change	dV/dt	V/ μS	10.000	
Operating Junction Temperature	T_J	$^\circ\text{C}$	150	



DIM	ITEM	μm
A_x	Wafer Form Die Size	1750
A_y		1750
B_x	Top Metal Size	1610
B_y		1610
D	Thickness	300max.
	Scribe line Width	80

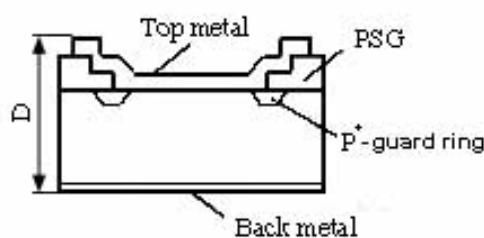

Top metal: a) Al – for Wire Bonding;
b) Al-Ni-Ag – for Soldering.

Backside metal: Ti-Ni-Ag.